CosyFloor

Surface Mounted Manifold Cabinet



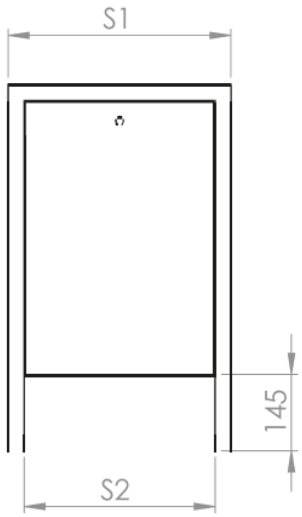

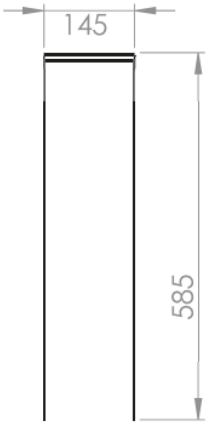

Product Features

MATERIAL

hot-dip galvanized steel sheet 0.8 mm thick, powder coated in white - RAL 9003

DESIGN

- the back wall equipped with rails and bolts for mounting manifold
- side walls with holes for the supply and return pipe of heating medium
- feet for mounting cabinets to the floor
- screws for fixing the manifold
- removable front door
- cabinet doors with a lock and key

Cabinets are used for building water supply valves and heating and underfloor heating pump sets. Cabinet is designed to be mounted on a wall surface

Product standard: PN-M -74081:1998 Industrial fittings - street boxes used in water and gas installations PN-EN 13438:2013

	Dimensions [mm]			
Index	S1 [mm]	S2 [mm]	H [mm]	D [mm]
SMCAB725	725	675	585	145
SMCAB980	980	930	585	145